





Как получить Zero Trust

Все пользователи Zero Trust получают бесплатный WARP+ который ускоряет соединение и работу WARP в целом


- 1) Заходим на dash.cloudflare.com и входим в аккаунт, например, через гугл
- 2) Нажимаем на Zero Trust

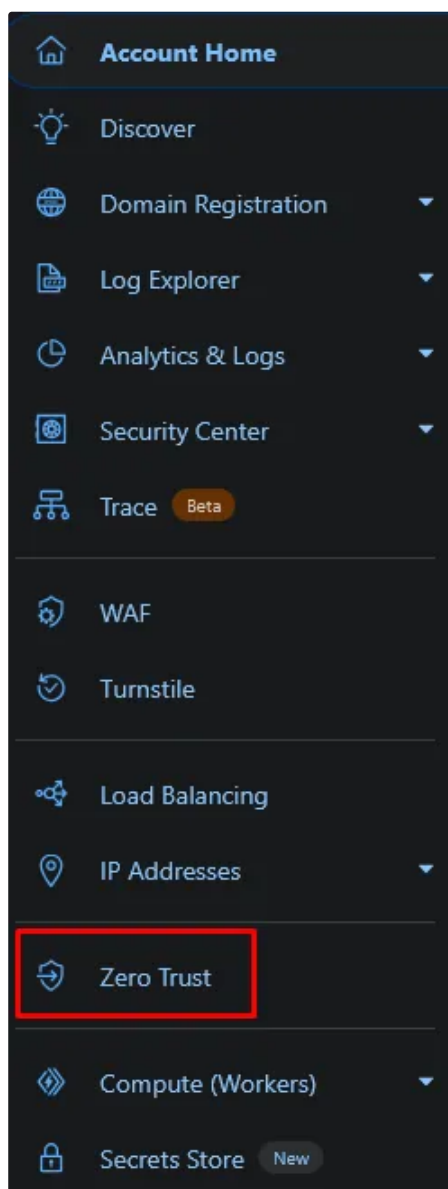

- 3) Придумываем любое имя для своей "команды"

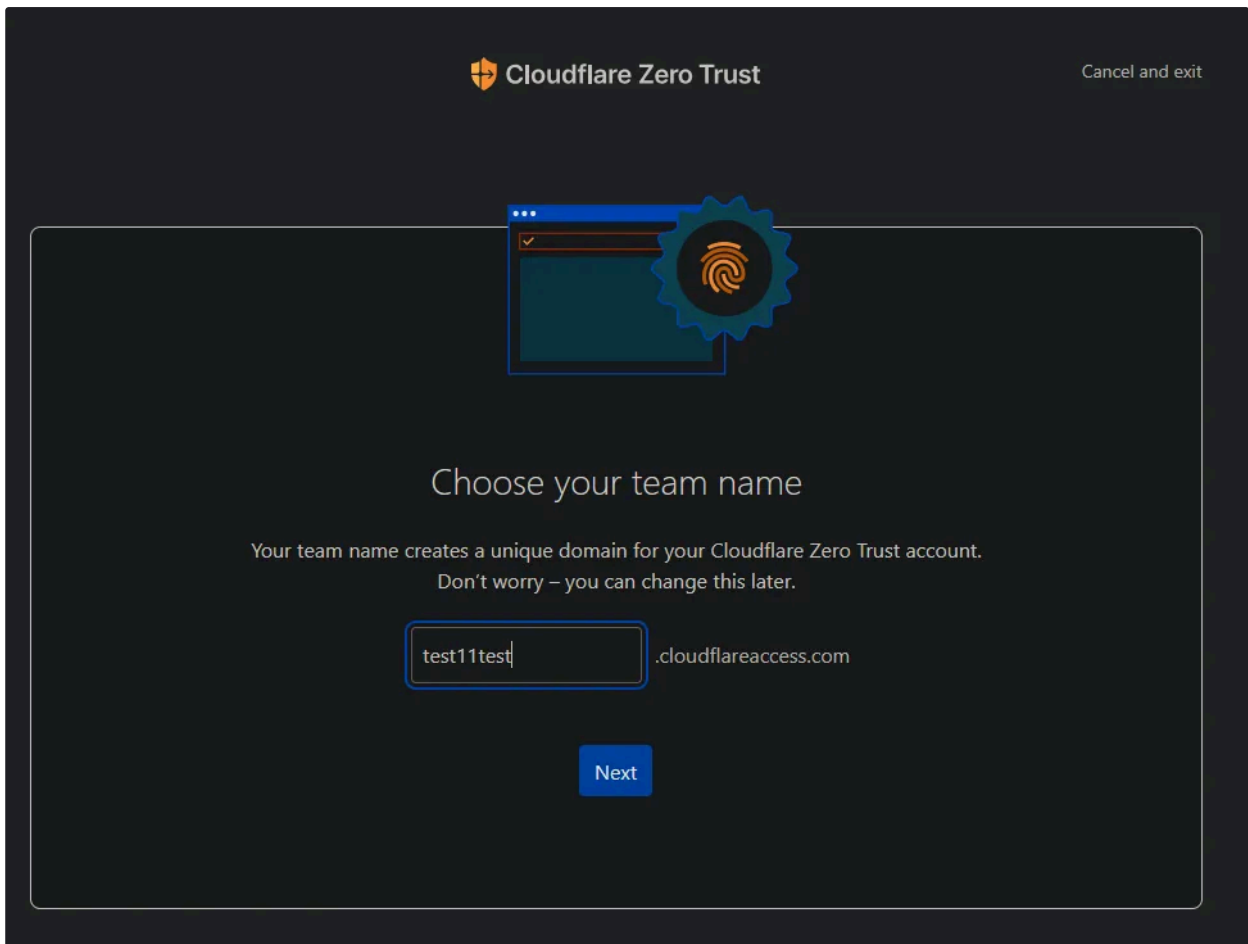


4) Нам предложат выбрать план для оплаты. Отказываемся.

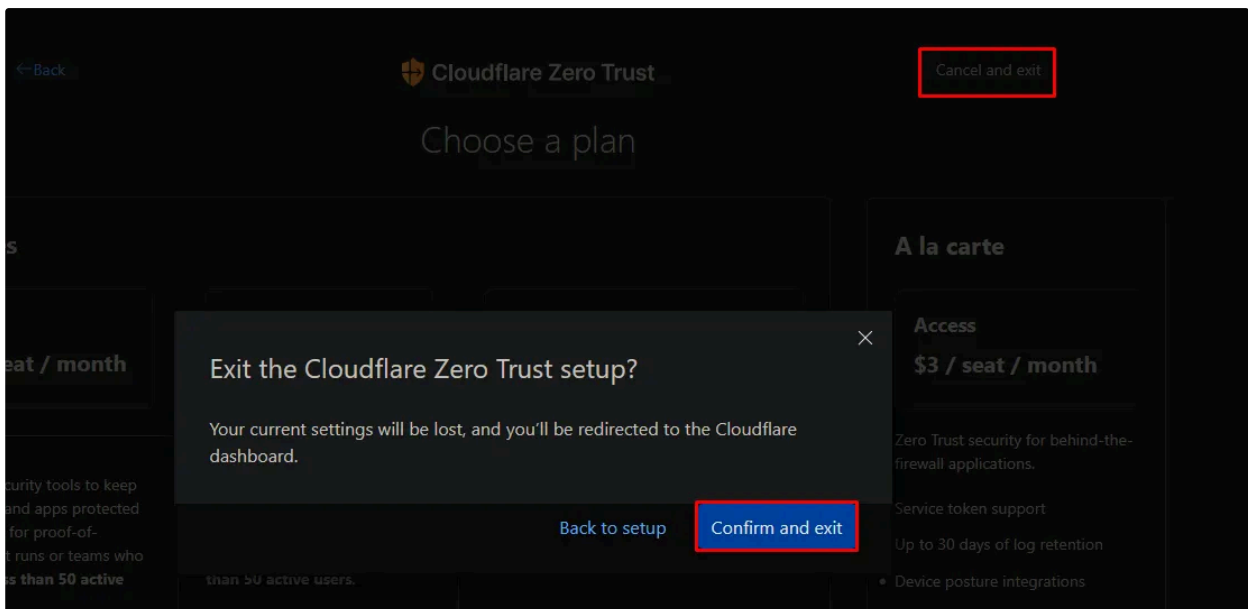

5) Жмём Zero Trust ещё раз

6) Переходим в раздел **Access** → **Policies** и нажимаем **"Add a policy"**

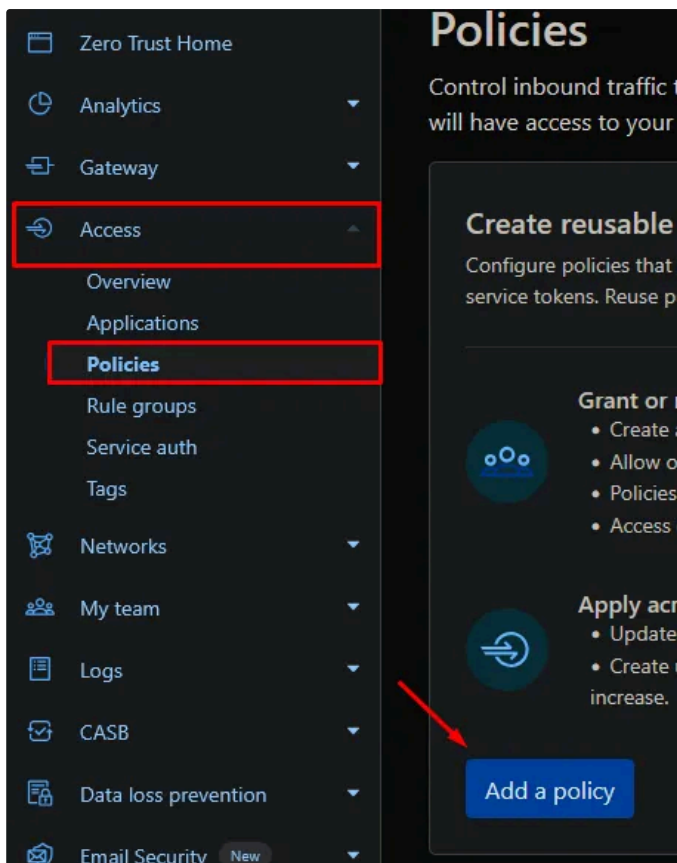

7) В поле "Policy name" вводим любое название.
В поле "Selector" выбираем "Emails ending in"

Basic Information

Name your policy and choose the action Access should take. [Access action documentation](#)

Policy name (Required)	Action (Required)	Session duration
email	Allow	Same as applica

5 / 350

Add rules

Define the policy's scope using rule types, selectors, and selector values. Selectors are the type of criteria users to meet. Configure additional selectors by adding lists, login methods, and device posture checks. [Selector documentation](#)

Include OR

If more than one Include rule is configured, users only need to meet one of the criteria.

Selector (Required)	Value
Select...	Select criteria for your rule
Common name	
Country	
Emails	
Emails ending in	
Everyone	
External Evaluation	

...ity of active users. Login decisions may differ if there are c
evaluated by this policy.

8) В поле "Value" вводим gmail.com

Include OR

If more than one Include rule is configured, users only need to meet one of the criteria.

Selector (Required)	Value
Emails ending in	gmail.com

9) Сохраняем. Жмём на "Save" в самом низу

Add rules

Define the policy's scope using rule types, selectors, and selector values. Selectors are the type of criteria or attributes you want users to meet. Configure additional selectors by adding lists, login methods, and device posture checks. [Selector documentation](#)

Include OR

If more than one Include rule is configured, users only need to meet one of the criteria.

Selector (Required)	Value
Emails ending in	@gmail.com

+ [Add include](#) + [Add require](#) + [Add exclude](#)

Policy tester

The policy tester evaluates the last seen identity of active users. Login decisions may differ if there are changes to user attributes evaluated by this policy.

[Test policy](#)

> **Additional settings (optional)**

Cancel [Save](#)

10) Далее жмём на Settings → Authentication → Go to WARP

Logs

CASB

Data loss prevention

Email Security **New**

Browser Isolation **New**

Settings

Authentication

Set global preferences for applications protected behind Access.

→

Authentication

Global session timeout
Set the maximum session length for all your applications. **Timeout** Same as application session timeout [Edit](#)

App Launcher [Manage](#)
Define who has access to the App Launcher.

WARP authentication identity settings [Go to WARP](#)
Allow users to log in to Access applications with the WARP/Gateway session identity. Users will need to reauthenticate based on the defined session duration.

11) Дальше нажимаем на Policies → Select existing policies

Policies Login methods

These rules do not impact permissions for any of the applications behind Access.

Access policies
Add from your existing policies or create new ones.
Note: Access will evaluate policies with Bypass and Service Auth actions first. Then, policies are evaluated in top-to-bottom order.
[Order of execution documentation](#) ↗

[Select existing policies](#) [+ Create new policy](#)

Order	Policy name	Action	Rules	Policy ID
-------	-------------	--------	-------	-----------

12) Ставим галочку возле нашего правила и жмём "Confirm"

Select existing policies

Access will apply policies in the order they are selected.

Select policies

🔍 Entry name

email ALLOW [View details](#) ↗

Cancel [Confirm](#)

13) Сохраняем. Нажимаем "Save"

Policies Login methods

These rules do not impact permissions for any of the applications behind Access.

Access policies

Add from your existing policies or create new ones.

Note: Access will evaluate policies with Bypass and Service Auth actions first. Then, policies are evaluated in top-to-bottom order. [Order of execution documentation](#) ↗.

[Select existing policies](#) [+ Create new policy](#)

Order	Policy name	Action	Rules	Policy ID
⋮ 1	email	ALLOW	1	0ef77831-3f7d-4cc7-b966-1b696119c104 ⋮

Policy details

> email ALLOW

Cancel **Save**

*Далее нам понадобится вводить название нашей команды в самом клиенте WARP. Если вы забыли название, то его можно найти в разделе Settings → Custom Pages

Zero Trust Home

Analytics

Gateway

Access

Networks

My team

Logs

CASB

Data loss prevention

Email Security New

Browser Isolation New

Settings

Custom Pages

Team domain
This is where the App Launcher lives, and where users make access requests to applications behind Access.

[REDACTED].cloudflareaccess.com [Edit](#)

Account Gateway block page
Configure your account's default Gateway block page. Gateway will display this page to end-users when your policies block a destination. [Customize](#)


Current selection: Default Gateway block page

Login page [Customize](#)
Users will see this page when they reach an application behind Access.

14) Включаем сторонний vpn

ВАЖНО!!!!!! Перед тем как подключать Zero Trust, вы должны включить любой рабочий VPN. Если у вас таких нет, то можно использовать [Подписки](#)

15) Открываем настройки

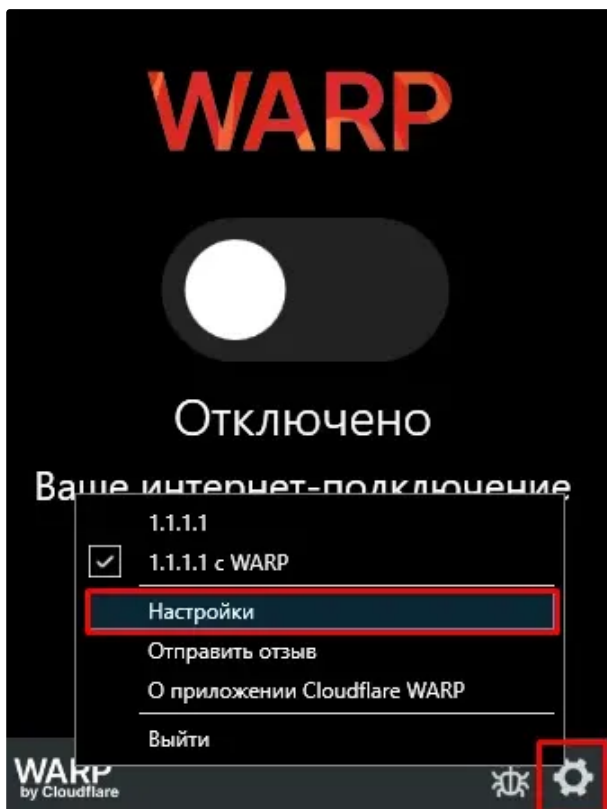

16) Переходим в раздел Учетная запись и жмём "Вход в Cloudflare Zero Trust"

Основные

Подключение

Учетная запись

Отзывы

Подключение

Тип учетной записи: WARP

Лицензионный ключ: VF5e290Z-27Qzsi65

Использовать другой ключ

Устройства, на которых используется ваш лицензионный ключ

